



ESTIMATE

Est. No: IRE-2026-0613

Date: June 12, 2026

Valid For: 30 Days

Driveway Repair, Decorative Walkways & Drainage Upgrade

2433 Chesterwood Drive, Little Elm, TX

PREPARED BY

Imperial Remodeling EVR

Dallas – Fort Worth Metroplex, TX

(214) 517-1951

imperialremodelingevr@gmail.com

CLIENT / PROPERTY OWNER

Linda LaCounte

2433 Chesterwood Drive

Little Elm, TX

(214) 235-6071

Hypergoob@sbcglobal.net

PROJECT OVERVIEW

This estimate covers four (4) scopes of work at the subject property: **(1)** full assessment and structural repair of the settled concrete driveway slab — including foundation gap correction at the garage opening and crack remediation; **(2)** removal and replacement of the deteriorated brick apron at the street entrance; and **(3)** design and installation of a new decorative concrete-paver walkway from the driveway to the front entry door, inspired by the client's selected reference style (large-format pavers with black river rock border); and **(4)** installation of matching decorative paver walkways along both side yards of the property, including full cleaning, repair, and upgrade of all existing drainage grates (tragantes) to prevent water accumulation and clogging.

SCOPE OF WORK

#	DESCRIPTION OF WORK	AREA / DETAIL	EST. COST
PHASE 1 — DRIVEWAY FOUNDATION REPAIR (DRAGÜEY)			
1	Foundation Gap Correction at Garage Opening The concrete driveway slab has settled and separated from the house	Garage Entry Foundation	\$1,200 – \$2,000

#	DESCRIPTION OF WORK	AREA / DETAIL	EST. COST
	foundation, creating a structural gap at the garage threshold. Work includes: • Excavation and inspection of the separation area • Polyurethane foam injection / mudjacking to lift and re-level settled slab panels • Sealing of foundation gap with flexible, weatherproof concrete caulk • Reinforcement and compaction of sub-base where required		
2	Driveway Surface Crack Repair & Sealing Routing, cleaning, and filling of all visible surface cracks across the driveway slab. Application of penetrating concrete sealer for long-term protection and improved appearance. • Crack routing and polyurethane joint filler • Full surface pressure wash prior to sealing • Two-coat penetrating concrete sealer	Full Driveway	\$600 – \$900

#	DESCRIPTION OF WORK	AREA / DETAIL	EST. COST
---	---------------------	------------------	-----------



CURRENT CONDITION — Slab separation at garage threshold — driveway has settled away from the foundation



CURRENT CONDITION — Gap measured at the driveway edge — soil washout under slab



CURRENT CONDITION — Surface cracking across driveway panels



CURRENT CONDITION — Joint deterioration and hairline cracks

PHASE 2 — BRICK APRON REMOVAL & REPLACEMENT

3	Demo & Haul Away — Existing Brick Apron Complete removal of the deteriorated, stained, and structurally compromised brick apron at the street-to-driveway transition. Full debris haul-away included.	Street Entrance	\$300 – \$500
4	New Concrete Apron Installation Grading and compaction of base, rebar reinforcement, forming, and pour of new 4" reinforced concrete apron to match existing driveway height and slope. Smooth broom finish. • Approx. 8 ft wide × 6 ft deep (±48 sq ft) • 3,000 PSI concrete with fiber reinforcement • Proper expansion joint at driveway connection	Street Entrance	\$900 – \$1,400

#	DESCRIPTION OF WORK	AREA / DETAIL	EST. COST
---	---------------------	------------------	-----------



CURRENT CONDITION — Existing brick apron — deteriorated mortar joints, staining, and uneven settling at street entrance

PHASE 3 — NEW DECORATIVE WALKWAY (FRONT ENTRY)

5	Site Preparation & Base Work Excavation of existing lawn area along walkway path, removal of sod, grading, and installation of compacted gravel base. Steel or aluminum landscape edging installed on both sides. • Approx. 4 ft wide × 18–20 ft long • 4" compacted crushed stone base • Landscape fabric weed barrier	Front Yard	\$400 – \$600
6	Large-Format Concrete Paver Installation Supply and installation of premium 24" × 24" concrete pavers (light/buff tone) centered along the walkway path, set on a stable sand-bedding layer. Pattern matches client's reference design. • Approx. 9–10 pavers (24" × 24" each) • Level-set on polymeric sand bed • Even spacing with consistent joint lines	Walkway	\$1,200 – \$1,800
7	Black River Rock / Decorative Stone Infill Supply and installation of black polished river rock to fill the spaces between and alongside the concrete pavers, contained within the steel edging. Depth: approximately 2–3 inches. • Approx. 60–70 sq ft of stone coverage • Installed over landscape fabric barrier	Walkway	\$500 – \$800

#	DESCRIPTION OF WORK	AREA / DETAIL	EST. COST
---	---------------------	---------------	-----------

- | | | | |
|---|--|-----------|----------|
| 8 | Final Grading, Cleanup & Client Walkthrough
All debris hauled away, surrounding lawn areas restored to original condition, final joint sand sweep and compaction, client walkthrough and sign-off. | All Areas | Included |
|---|--|-----------|----------|



CURRENT CONDITION — Front yard today — no walkway from driveway to entry door



REFERENCE DESIGN — Selected design: large-format pavers with black river rock border

PHASE 4 — SIDE-YARD WALKWAYS & DRAINAGE SYSTEM (BOTH SIDES)


- | | | | |
|----|--|-----------------|-------------------|
| 9 | Site Preparation — Both Side Yards
Excavation and removal of existing soil, overgrown vegetation, and debris along both sides of the house. Grading, leveling, and installation of compacted crushed-stone base. Steel landscape edging installed on all borders for clean, permanent containment. <ul style="list-style-type: none"> • Left side — approx. 4 ft wide × 35 ft long • Right side — approx. 4 ft wide × 35 ft long • 4" compacted gravel base + landscape weed barrier fabric | Both Side Yards | \$700 – \$1,000 |
| 10 | Large-Format Concrete Paver Installation — Both Sides
Supply and installation of 24" × 24" concrete pavers (buff/light tone) along the full length of both side yards, matching the front walkway design. Set on polymeric sand bed, level and evenly spaced. | Both Side Yards | \$1,600 – \$2,400 |

#	DESCRIPTION OF WORK	AREA / DETAIL	EST. COST
	• Approx. 9–10 pavers per side (18–20 total) • Centered path layout with consistent joints • Matching finish to front entry walkway		
11	Black River Rock Infill — Both Sides Supply and installation of black polished river rock filling all spaces between and alongside pavers on both side yards. Installed over weed barrier at 2–3 inch depth. Total coverage approx. 220–240 sq ft.	Both Side Yards	\$900 – \$1,400
12	Drainage Channel (Tragante) Cleaning, Repair & Upgrade — Both Sides Full service of all existing drainage grates and channels on both sides of the house to prevent rainwater accumulation and flooding. Work includes: • Complete cleaning and debris removal from all drain channels • Inspection and repair of existing drain bodies and outlet connections • Installation of heavy-duty catch basin grates (debris-blocking design) integrated flush into the river rock surface • Channel slope correction where needed to ensure proper water flow away from foundation • Final flow test with water to confirm all drains are fully functional	Left Side Right Side Drainage	\$800 – \$1,200


#	DESCRIPTION OF WORK	AREA / DETAIL	EST. COST
---	---------------------	------------------	-----------




CURRENT CONDITION — Side yard — bare soil, water pooling area along fence line

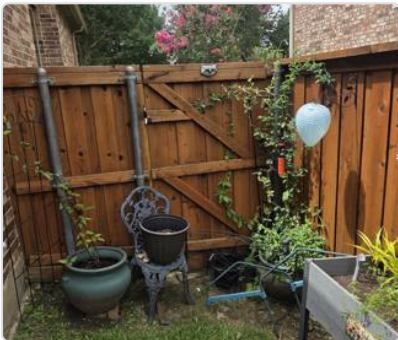

CURRENT CONDITION — Side yard — mud accumulation when it rains; drains clogged with debris

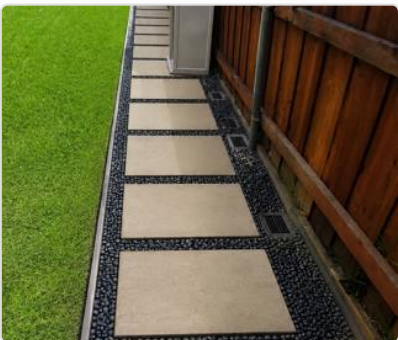

REFERENCE DESIGN — Reference: matching paver path with river rock and integrated drain grates

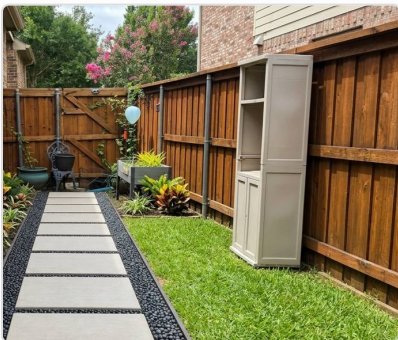

REFERENCE DESIGN — Reference: finished side-yard walkway, clean and fully drained

Phase 1 — Foundation & Crack Repair	\$1,800 – \$2,900
Phase 2 — Brick Apron Demo & Replacement	\$1,200 – \$1,900
Phase 3 — Front Decorative Walkway	\$2,100 – \$3,200
Phase 4 — Side Walkways (×2) & Drainage	\$4,000 – \$6,000
Estimated Total Range	\$9,100 – \$14,000
BASE ESTIMATE	\$11,200

⚠ **IMPORTANT NOTE — PRICING CONDITIONS**

The **base estimate of \$6,500** reflects current labor and material costs for the described scope. The final price may vary based on: (1) the actual extent of driveway foundation settling discovered during excavation; (2) the specific paver brand, finish, and color

selected by the client; and (3) any additional foundation repairs identified on-site. A revised and binding contract will be issued after on-site measurement confirmation and material selection. No work will begin without a signed agreement and initial deposit.

TERMS & CONDITIONS

- ✓ This estimate is valid for 30 days from the date of issue.
- ✓ A signed contract and deposit are required before any work commences.
- ✓ All concrete work carries a 1-year workmanship warranty.
- ✓ Paver and stone material warranty subject to manufacturer terms.
- ✓ Any scope changes or additions will be quoted separately in writing prior to execution.
- ✓ Client is responsible for marking any underground utilities prior to excavation.
- ✓ All work performed in compliance with local building codes — Little Elm, TX.

Imperial Remodeling EVR
Contractor Signature & Date

Linda LaCounte — Client
Client Signature & Date — Acceptance of
Estimate

Imperial Remodeling EVR | Dallas–Fort Worth Metroplex, TX | (214) 517-1951 | ✉
imperialremodelingevr@gmail.com

Quality craftsmanship you can trust — guaranteed satisfaction on every project.